

An ISO 9001 : 2015 Certified Company

Expendable Lanyard
Ref: SF-EWL-2901 to 2909

Made of 44mm wide Polyester Tubular Webbing.

DESIGN

- All Lanyard with Different combinations of connectors mentioned.

WEBBING

Material: Polyester
 Width: 44mm. ± 1mm.
 Breaking Strength: 25 KN.

STITCHING THREAD

High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel
 Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

22 kN Minimum for Lanyard


RELEVANT STANDARDS

Meets or Exceeds EN 354:2010



Reference No.	SF-EWL-2901	SF-EWL-2902	SF-EWL-2903	SF-EWL-2904	SF-EWL-2905	SF-EWL-2906	SF-EWL-2907	SF-EWL-2908	SF-EWL-2909
Side - 1	Loop	Loop	SF-1102	Loop	SF-1201	Loop	SF-1201	SF-1102	SF-1201
Side - 2	Loop	SF-1102	SF-1102	SF-1201	SF-1201	SF-1301	SF-1102	SF-1301	SF-1301

TECHNICAL DATA SHEET
 FALL PROTECTION EQUIPMENTS

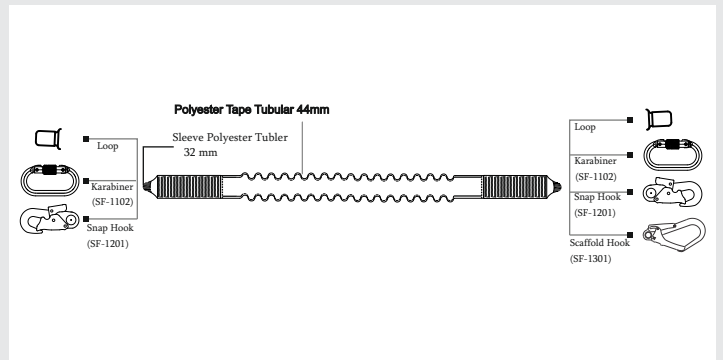

C-36 UPSIDC Industrial Area, Rooma,
 Kanpur- 209402 (UP) INDIA



info@virajsyntax.com



www.virajsyntax.com