

An ISO 9001 : 2015 Certified Company

Forked Lanyard With Energy Absorber

Ref: SF-FWL(E)-3701(D)

Made of 44mm wide Polyester Tubular and Webbing

DESIGN

- Karabiner (SF-1102) with D-Ring Energy Absorber (SF-EA-4400) at one end and two Steel Scaffold Hooks (SF-1301) at other ends.

WEBBING

Material: Polyester
Width: 44mm. ± 1mm.
Breaking Strength: 25 KN.

STITCHING THREAD

High-tenacity Polyester

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

22 kN Minimum for Lanyard
15 kN Minimum for Energy Absorber

RELEVANT STANDARDS

Meets or Exceeds EN 355:2002

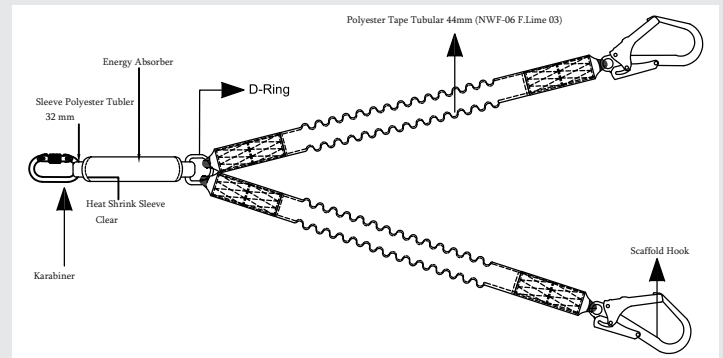

TECHNICAL DATA SHEET
FALL PROTECTION EQUIPMENTS

