

STEALTH™ 16g

CLEAR / SMOKE - ANTI MIST / ANTI SCRATCH

**TECHNICAL
SPECIFICATION**

PRODUCT CODE: ASA920-1__ - _00

THE WORLDS MOST LIGHTWEIGHT SPECTACLE WITH NEXT GENERATION 9.5 BASE CURVE

EYE & FACE PROTECTION

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

**STEALTH™
16g**



STEALTH™ 16g FEATURES & PERFORMANCE

The world's lightest safety eyewear

Next generation dual 9.5 base

Ultra thin and ultra strong optically perfect lenses

Vented side arms and integral universal nosebridge

Maximum comfort for all day use

Available in either Clear or Smoke lens

Lenses include Hardia™ Anti-Scratch 'K' or PremierSHIELD™ Anti-Scratch & Anti-Mist 'KN'

Lenses filter out more than 99.9% of harmful UV light



CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN 166.1.F.KN & ANSI Z87.1

EC Certificate Number 726, issued by Inspec Certification Limited

STEALTH™ 16g

CLEAR / SMOKE - ANTI MIST / ANTI SCRATCH

**TECHNICAL
SPECIFICATION**

PRODUCT CODE: ASA920-1 - _00

THE WORLDS MOST LIGHTWEIGHT SPECTACLE WITH NEXT GENERATION 9.5 BASE CURVE

EYE & FACE PROTECTION

DIMENSIONS OF INNER PACKAGING

Quantity:

Weight:



**STEALTH™
16g**

HEIGHT:
85mm


WIDTH:
172mm

LENGTH:
290mm

DIMENSIONS OF OUTER PACKAGING

Quantity:

Weight: (Approx.)

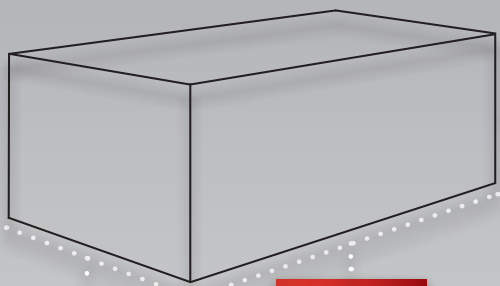

HEIGHT:
377mm

WIDTH:
315mm

LENGTH:
545mm

MARKINGS

Frame: EN166 1.F

Clear Lens Hardia+™: 2-1.2 ↑ 1.FT.K

Clear Lens PremierSHIELD™: 2-1.2 ↑ 1.FT.K.N

Smoke Lens Hardia+™: 5-2.5 ↑ 1.FT.K

DIMENSIONS OF SPECTACLE

Lens Thickness: 1.4mm

Lens Base: 9.5 curve

Lens Size (Vertical): 43.3mm

Lens Size (Diagonal): 71.4mm

Bridge: 13.4

Temple Length (Lens to tip): 164mm

Overall Width: 136.3

Closest point between lens: 12mm

Closest point between temple tips: 63~66mm

Weight: 16g

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 16g is not suitable for protection against dusts, liquids or molten metals